/ #512309 (1)

1/4 Corner Center 23 Elmira 105-11

6-1873 Hunter P230 no 233 d 22-23 d Fry, J O Sarry
A Jennings etal

set stake at inters of right lines. 1319.66.

1/16 west set stone 5x10x16 M&L 19.99½. N 89¼° E

1/16 east set stake, marked, M&L 19.93½. "

1/16 north set stake M&L 19.98. N 1° 5' W


1/16 south set sandstone. 2x12x18 M&L. 19.94½. "

1/16 center SE ¼ 23. set stone 2x10x17 at inters lines

1/16 center SW ¼ 23 set stone 3x6x19 " " "

7-26-85, Center SW¼: Dug as follows from a point at Hunter's full measure (probated) from stone found at the ⅛ West of the Center 23 and Hunter's full measure (probated) from the fence Nail at the Center SE¼ Sec. 23. Hole Turned out to be 10' deep so got a little small at the bottom. Probed quite a little. Conditions good but found nothing - probably just missed it.

9/16 So. of center 23 6/20/89
DUG WITH BACKHOE FROM 24' TO 32' WEST OF T.N. TO COVER COMPUTED LOCATION; FROM 2' TO 1' SOUTH OF T.N. COND. WERE POOR NO BLACK DIRT, CLAY WAS 2.5' DEEP FO NOTHING

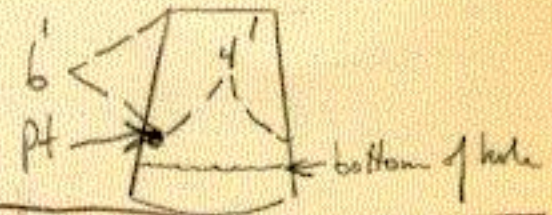

1/4 CORNER CENTER 23 ELMIRA (2)

6/20/89 CENTER S.E.1/4 23 #512309 105-11
DUG WITH BACKHOE FROM 2' NORTH TO 6' SOUTH OF T.N. & FROM 4' EAST TO 4' WEST OF T.N. THIS IS A CUT AREA WITH ALL MIXED UP FILL FOR ROAD. NORTH SIDE OF HOLE IS 2.5' DEEP TO CLAY SOUTH SIDE IS 2.0' DEEP TO CLAY FD NOTHING