1 8/18/88 SET C.I.C. /p² AT OLD POST LOCATION
#520106 (1)

1/4 corner 1-2 Orion 105-12

4-1856 Hunter P13 No 20 S1

used corner.

1/16 east 19.68 M & L. S 88½° W

N 75° E .2.42 chs

S 29½° E 1.06½ chs.

1/16 center S W 1/4 1. - 19.48 M & L on N-S 1/16 line

east N 89° E 19.72 to 1/16 cor on N-S 1/4 line

S 7° W 58 lks.

S 1½° E 39 lks.

GOV. NOTES - Oct 6, 1853

South 8' West on true LINE between
SECTION 1 + 2

40.19 SET 9x. SECTION post
BR. OAK 8 N 3 W 460 303.6
BR OAK 7 S 5 E 603 397.98

80.19 SECTION CORNER

8/1/88 DUG WITH BACKHOE FD OLD POST 5' SOUTH OF EXISTING FENCE, FD LARGER POST MARK RUNNING WELL DOWN INTO BLACK DIRT IN EXISTING FENCE LINE, 8/3/88 FD ANOTHER POST HOLE GOING DEEP IN EXISTING FENCE LINE 8' WEST OF OTHER ONE FD DEEP


8/18/88 SET C.I.C. 1p² AT LOCATION OF LARGE POST HOLE FD 8/1/88 IN E-W FENCE, MATCHES HUNTERS SURVEY OF 1856 DUE TO ROUGH COUNTRY SOME MEASUREMENTS VARY SOMEWHAT

CONT NEXT CARD

#520106 (2)

1/4 CORNER 1, 2 ORION 105-12

CONT FROM CARD #1 RP'S BOTTLE CAP IN GATE POST EAST 15.57', SPIKE IN TREE N.W. 21.00' TRAV IRON E.S.E 30.29', SET POST & SIGN 0.7' SOUTH OF CORNER. CORNER LINES WITH FENCES E & W, CREEK CALLED FOR IN GOV'T FIELD NOTES LIES NORTH ± 170'

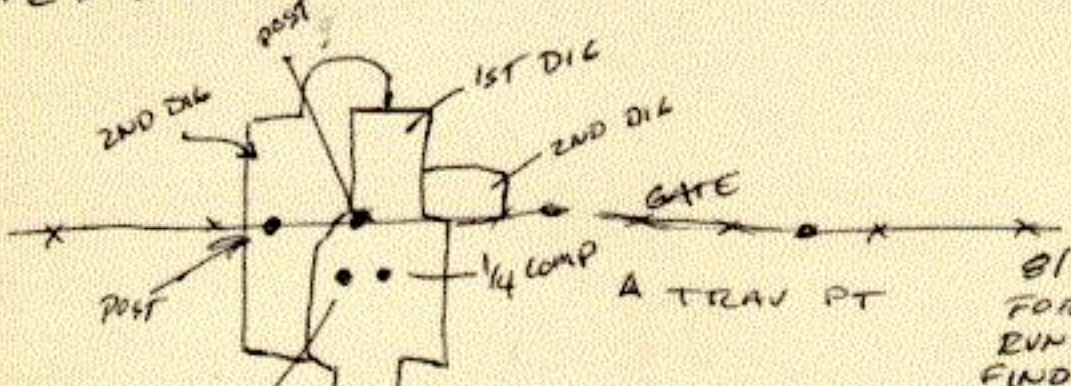

8/3/88 DUG FURTHER FOR MORE POSTS, NONE RUNNING N-S, BUT DID FIND POST HOLE GOING DEEP IN EXISTING FENCE LINE 8' WEST OF THE ONE FD @ 1.0'

DIG WAS TO COVER PROJECTION OF LINES FROM EAST & MEAS. FROM EAST. OLD FENCE IS RUNNING E-W ABOUT 5' SOUTH OF EXISTING FENCE. THIS POST BARELY GOT INTO BLACK DIRT THRUGH 2' OF FILTERED IN SOIL