
North ¼ Cor. 1 Farmington #83108 108-13

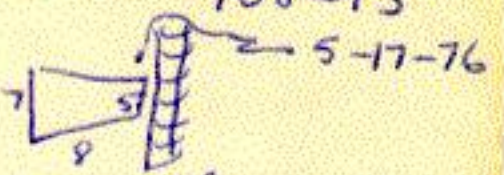


5-12-76 Dug 7/5 x 8' x 7' deep in ℄ E-W road. Digging centered on calculated midway 15' W of traverse nail set at fence S. Found nothing. CMP (apparent 2623 from E) set into black dirt will destroy most of area further East.

5-17-76 Dug again N of previous digging. Found possible stake hole 11.8 W of "nw" traverse nail and on line from S. ¼ 35 to Twp. Corner. Followed mark 16" down into clean clay.